
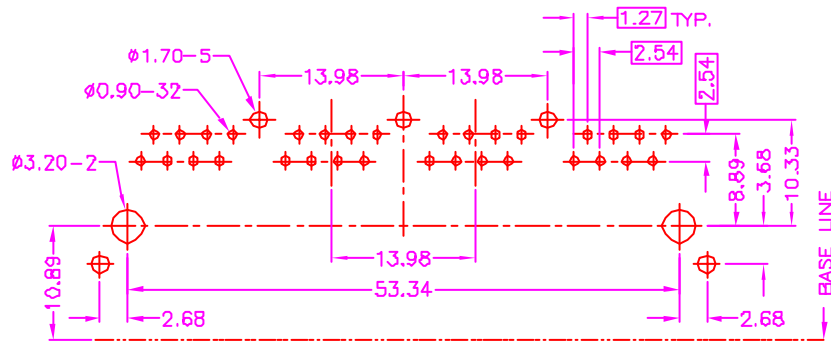
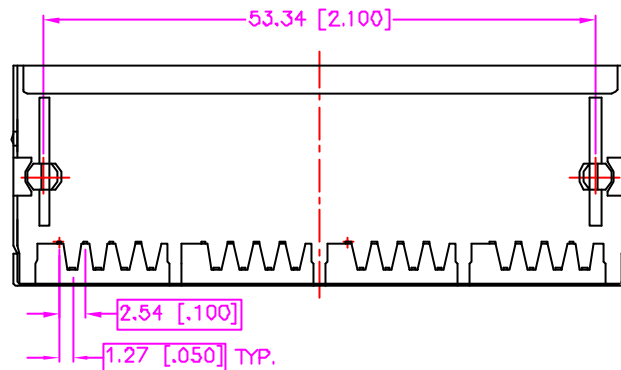
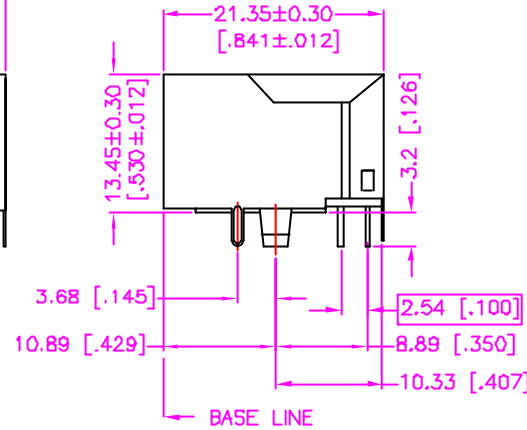


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 05, 2002
1		
2		

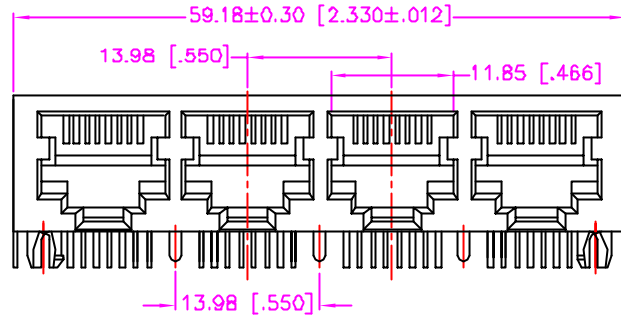

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.30mm)
- SHIELD : COPPER ALLOY, NICKEL PLATING. (t=0.25mm)

SPECIFICATION

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 40m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +70°C.
- DURABILITY : 750 CYCLES.

ORDER INFORMATION :

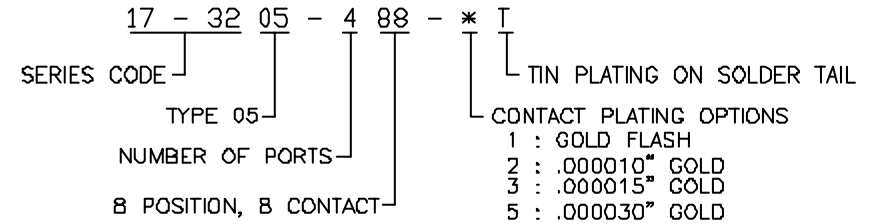

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>rus</i>		 ASTRON TECHNOLOGY CORP. NAME MODULAR GANG JACK SIDE ENTRY, METAL SHIELD
 UNITS : mm [inch]		CHECK <i>Katherine</i>		
SCALE NDNE		SIZE A4		APP'D <i>ASB</i>
SHEET 1 OF 1		REV. A		DRAW NO. C564-3205
T0001				