
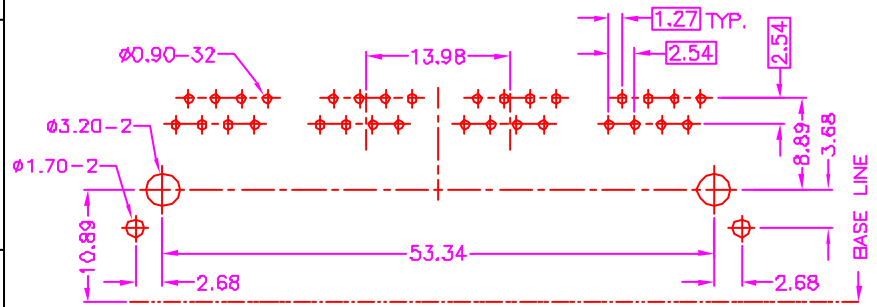
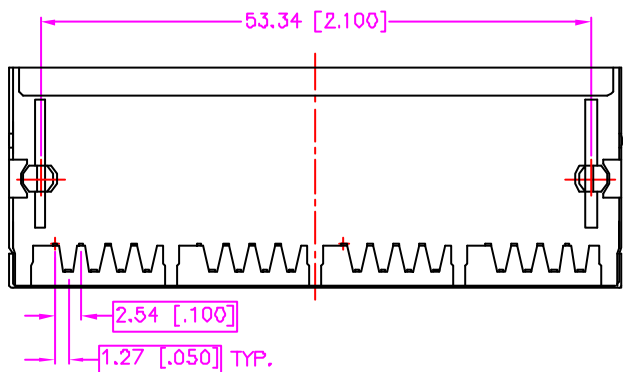
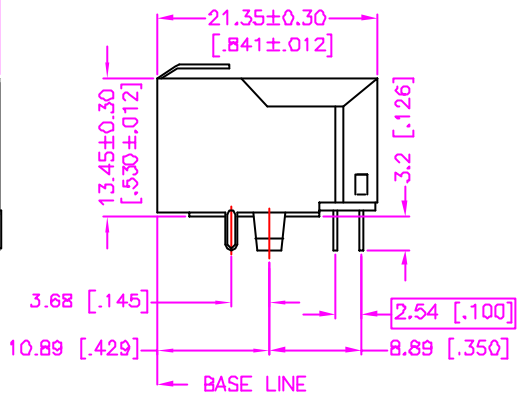


REV.	DESCRIPTION	DATE
—	RELEASE	Mar. 26, 2003
1		
2		

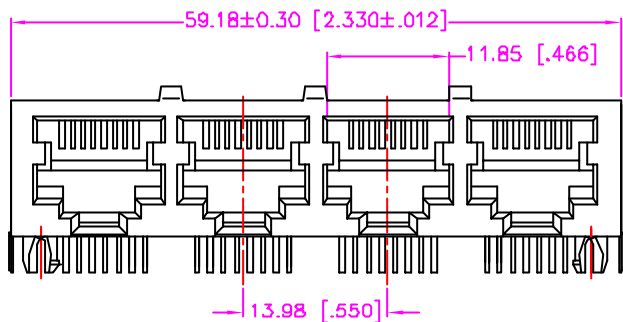

RECOMMEND P.C.B. LAYOUT  
TOP VIEW


**MATERIALS**


- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.30mm)
- SHIELD : COPPER ALLOY, NICKEL PLATING. (t=0.25mm)

**SPECIFICATION**

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 40m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +70°C.
- DURABILITY : 750 CYCLES.

**ORDER INFORMATION :**

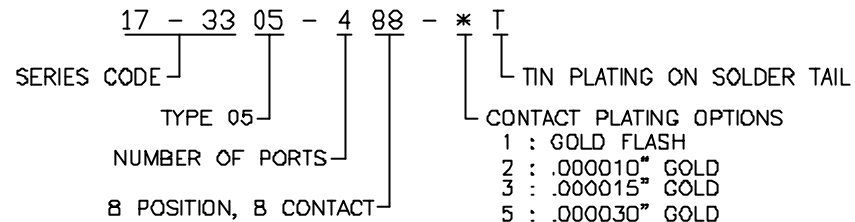

TOLERANCE .0±.38 [.015] .00±.25 [.010] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>SUB</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherlin</i>	
 UNITS : mm [inch]	APP'D <i>ALX</i>	DRAW NO. C564-3304
	PRODUCT SPEC. —	SHEET 1 OF 1
SCALE NDNE	SIZE A4	REV. A
		T0001