
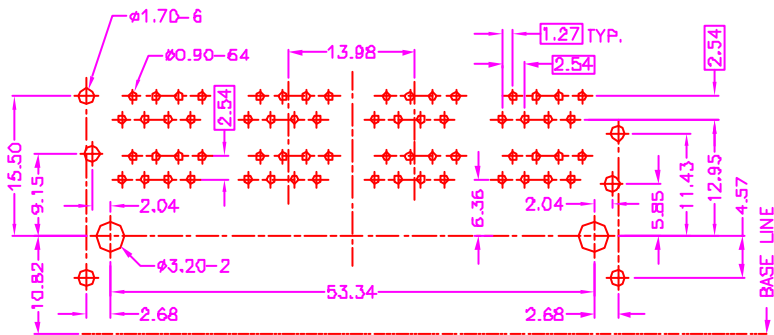
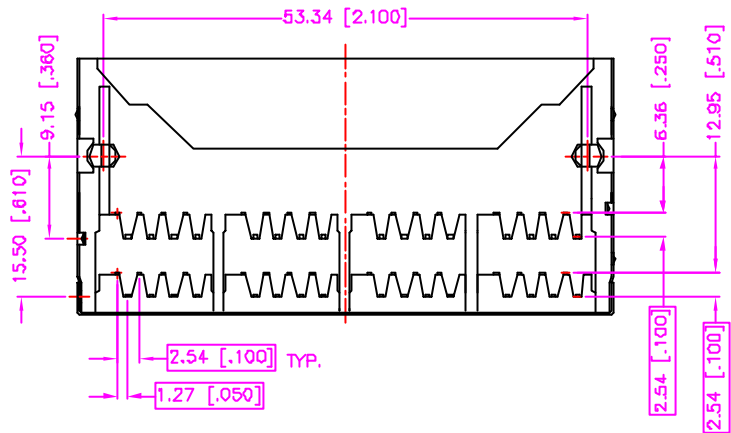
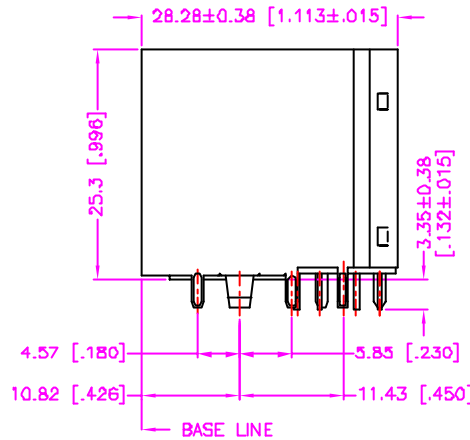


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 07, 2002
1		
2		

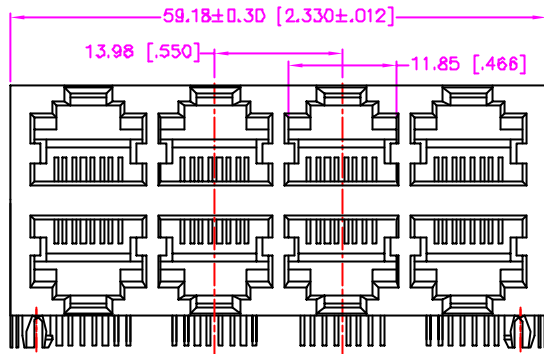

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

### MATERIALS

- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.30mm)
- SHIELD : COPPER ALLOY, NICKEL PLATING. (t=0.25mm)

### SPECIFICATION

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 40m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +70°C.
- DURABILITY : 750 CYCLES.

### ORDER INFORMATION :

17 - 42 02 - 24 88 - \* T

SERIES CODE | TYPE 02 | 2x4 PORTS | 8 POSITION, 8 CONTACT

TIN PLATING ON SOLDER TAIL  
CONTACT PLATING OPTIONS  
1 : GOLD FLASH  
2 : .000010" GOLD  
3 : .000015" GOLD  
5 : .000030" GOLD

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>SUS</i>		 ASTRON TECHNOLOGY CORP.
 UNITS : mm [inch]		CHECK <i>Kathleen</i>		
SCALE NONE		SIZE A4		DRAW NO. C564-4201
SHEET 1 OF 1		REV. A		T0001