REV.	DESCRIPTION	DATE
A	RELEASE	Aug. 15, 2002
B	DRAW MODIFY	Feb. 08, 2004
C		

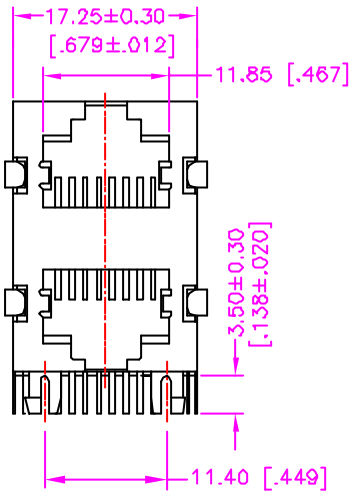

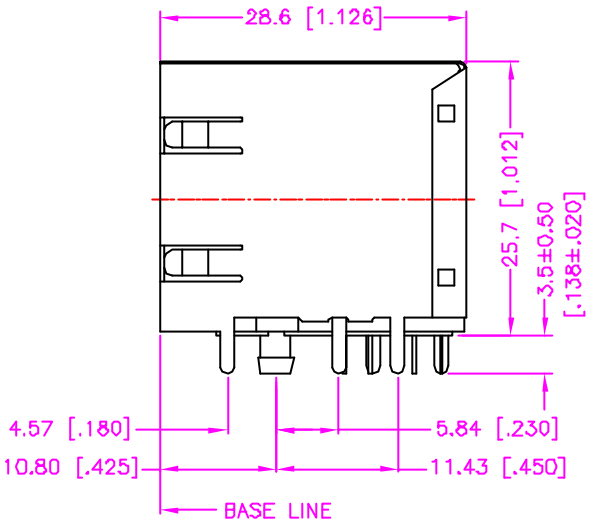

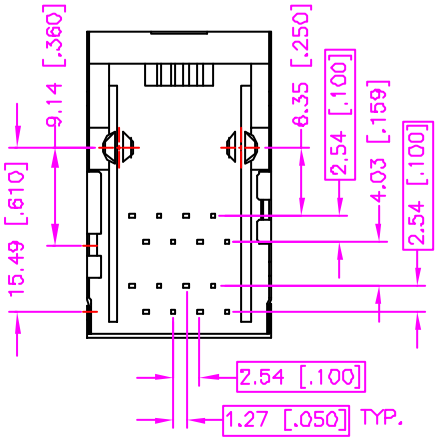

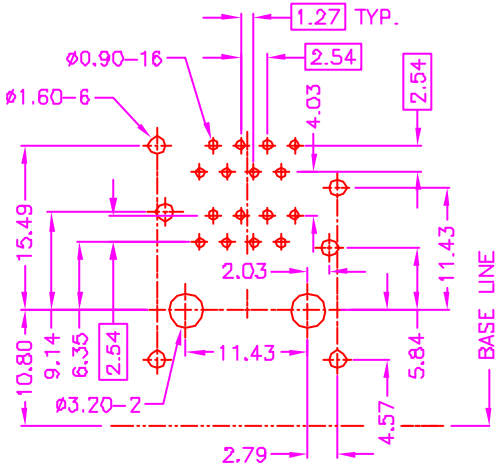

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.35mm)
3. SHIELD : COPPER ALLOY, NICKEL PLATING. (t=0.25mm)

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +70°C.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

17 - 43 02 - 21 88 - * T

- 17 - 43 : SERIES CODE
- 02 : TYPE 02
- 21 : 2x1 PORTS
- 88 : 8P8C
- * : CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- T : TIN PLATING ON SOLDER TAIL

TOLERANCE .0=±0.38 [.015] .00=±0.25 [.010] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE	Astron WWW.ASTRON.COM.TW	
	CHECK Katherine		
	APP'D LION	NAME MODULAR GANG JACK SIDE ENTRY, METAL SHIELD WITH SPRING	
UNITS : mm [inch]	PRODUCT SPEC. —		
	506-0013	DRAW NO. C564-4302	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. B	08015	