
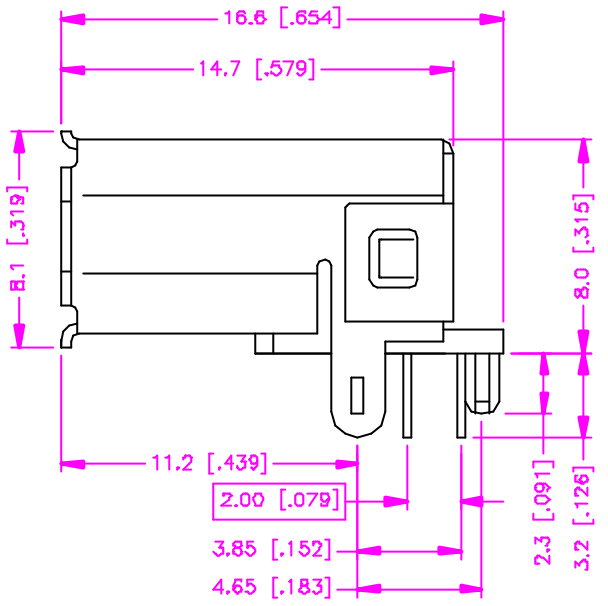


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 03, 2002
1		
2		

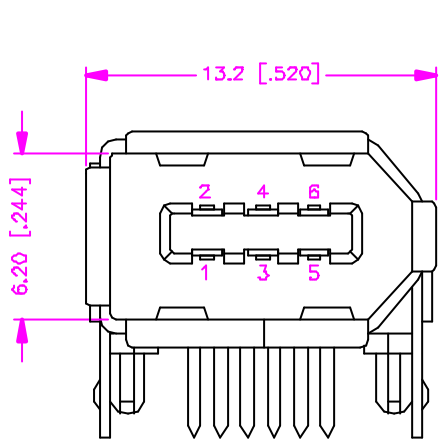

MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0).
2. TERMINAL : COPPER ALLOY. (t=0.25mm)
3. SHELL : COPPER ALLOY, NICKEL PLATING. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 1500 CYCLES.



ORDER INFORMATION :

21 - 01 03 - 6 * - * T

SERIES CODE — TYPE 03 — NUMBER OF POSITIONS — HOUSING COLOR OPTIONS W : WHITE BLANK : BLACK

TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

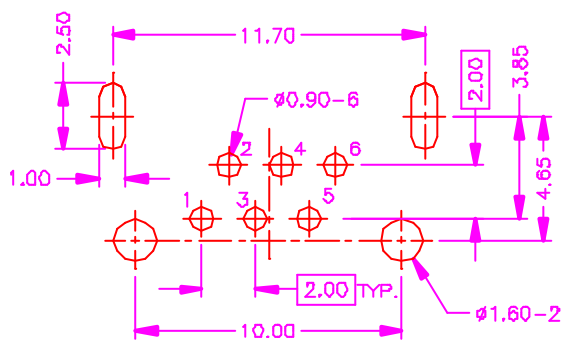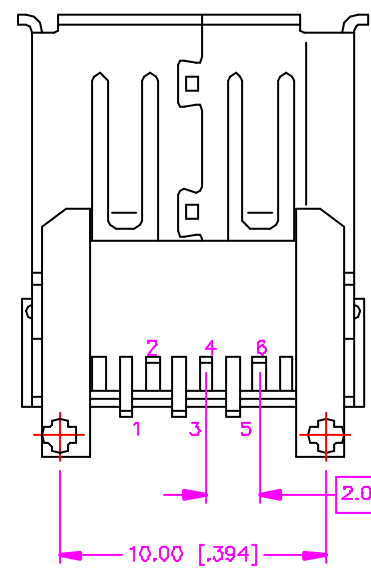

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>SUB</i> CHECK <i>Katherlin</i> APP'D <i>WJSELY</i>	 Astron ASTRON TECHNOLOGY CORP. NAME IEEE 1394 CONNECTOR P.C.B. MOUNT, RIGHT ANGLE METAL SHIELD, FEMALE
UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C621-0103
SHEET 1 OF 1	REV. A	09015