
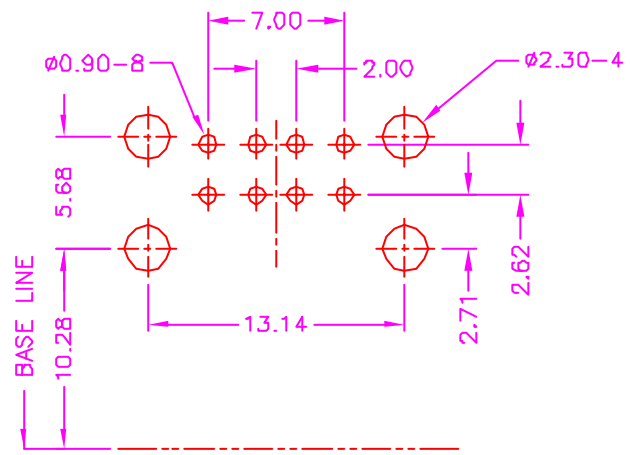
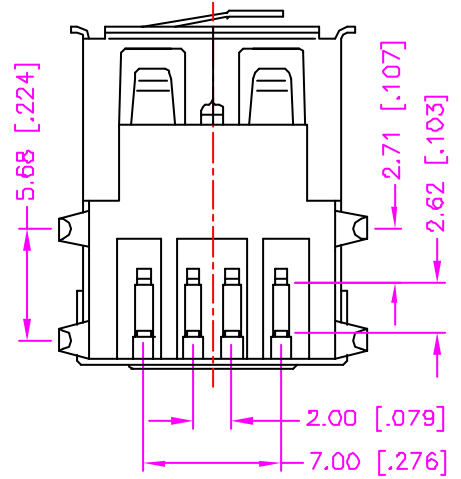
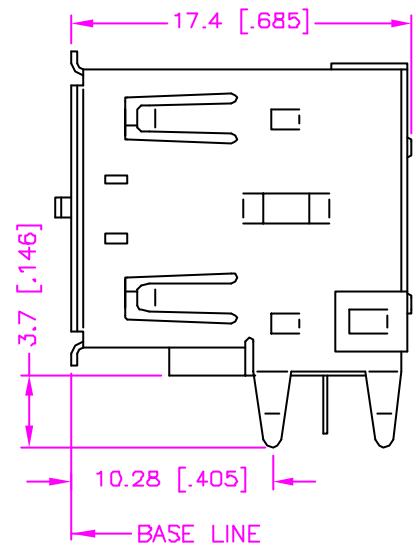


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 19, 2002
1	HOUSING COLOR ADD.	Aug. 16, 2002
2	DRAW MODIFY	Jan. 22, 2003
3	DRAW MODIFY	Sep. 09, 2003

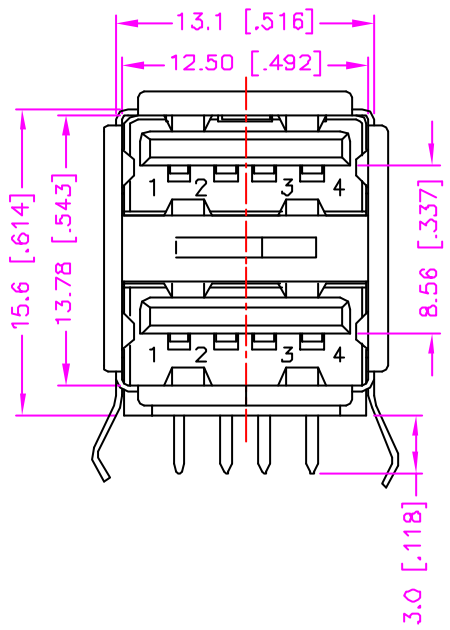

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : POLYESTER (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE. (t=0.25mm)
3. FRONT SHELL : BRASS, NICKEL PLATING.
4. REAR SHELL : SPCC, NICKEL PLATING.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 750V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -50°C TO +105°C.
6. DURABILITY : 1500 CYCLES.
7. MATING FORCE : 1.0 ~ 3.6kgs.
8. UNMATING FORCE : 1.0 ~ 3.6kgs.

ORDER INFORMATION :

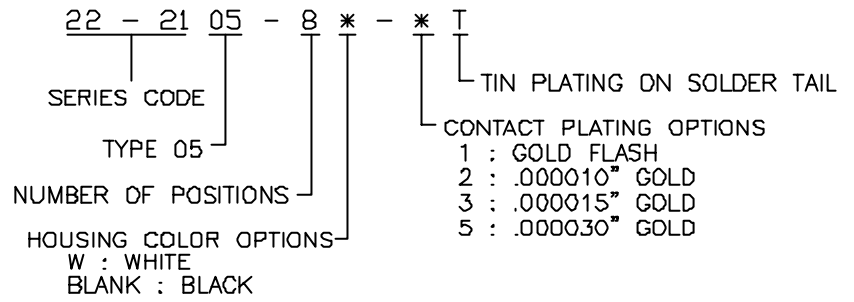

TOLERANCE	
.0=±0.30 [.012]	
.00=±0.20 [.008]	
.000=±.XXX	
.0000=±.	
ANG.=±3°	
UNITS : mm [inch]	
SCALE NONE	SIZE A4

DRAWER <i>SUS</i>
CHECK <i>Katherine</i>
APP'D <i>LSON</i>
PRODUCT SPEC.
SHEET 1 OF 1
REV. D

Astron	
ASTRON TECHNOLOGY CORP.	
NAME STACKED USB P.C.B. MOUNT A TYPE, R/A, METAL SHIELD, FEMALE	
DRAW NO. C622-0506	
10004	