REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 19, 2002
1	HOUSING COLOR ADD.	Aug. 16, 2002
2	DRAW MODIFY	Jan. 22, 2003
3	DRAW MODIFY	Sep. 09, 2003

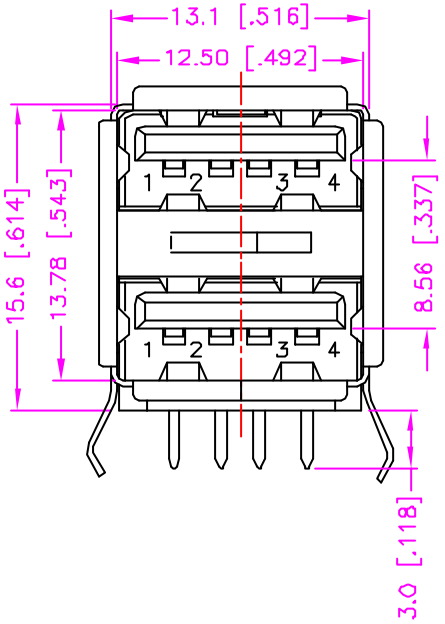

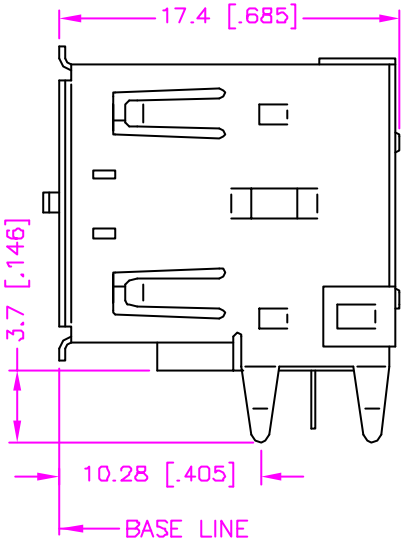

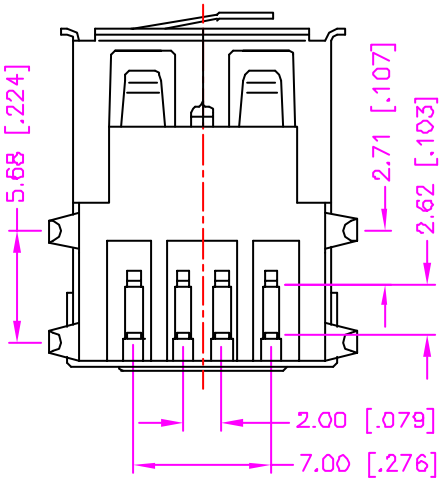

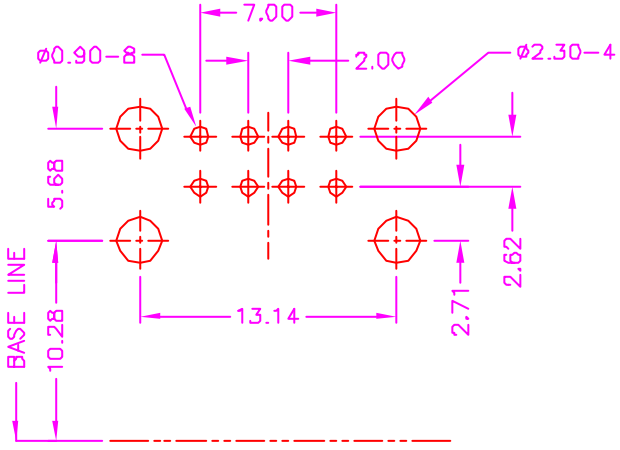

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE. (t=0.25mm)
3. FRONT SHELL : BRASS, NICKEL PLATING.
4. REAR SHELL : SPCC, NICKEL PLATING.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 750V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -50°C TO +105°C.
6. DURABILITY : 1500 CYCLES.
7. MATING FORCE : 1.0 ~ 3.6kgs.
8. UNMATING FORCE : 1.0 ~ 3.6kgs.

ORDER INFORMATION :

22 - 21 05 - 8 * - * T

- 22 - 21 : SERIES CODE
- 05 : TYPE 05
- 8 : NUMBER OF POSITIONS
- * : HOUSING COLOR OPTIONS
  - W : WHITE
  - BLANK : BLACK
- * : CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- T : TIN PLATING ON SOLDER TAIL

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE	Astron ASTRON TECHNOLOGY CORP.	
	CHECK Katherlin		
	APP'D LION	NAME STACKED USB P.C.B. MOUNT A TYPE, R/A, METAL SHIELD, FEMALE	
UNITS : mm [inch]	PRODUCT SPEC.	DRAW NO. C622-0506	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. D	10004	