| REV. | DESCRIPTION | DATE |
|---|---|---|
| — | RELEASE | Jun. 28, 2002 |
| 1 | | |
| 2 | | |

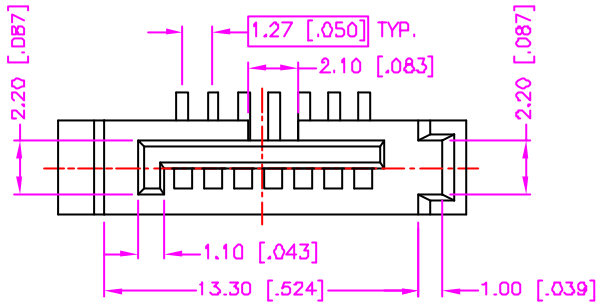


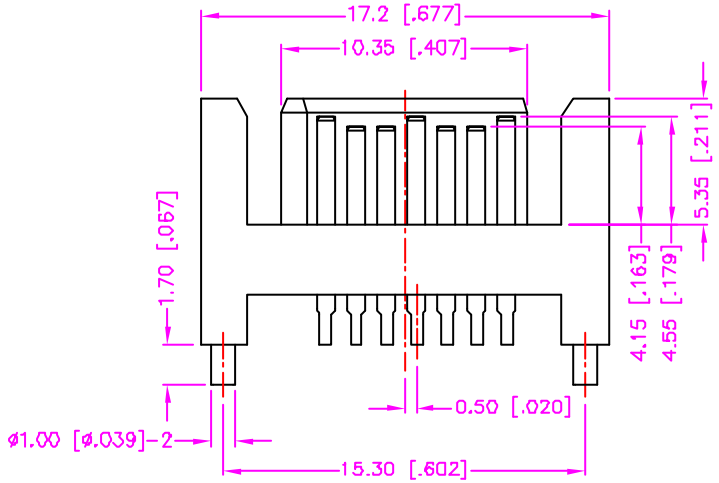


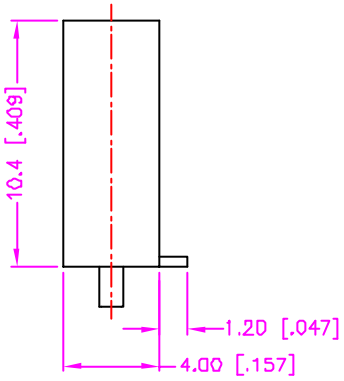


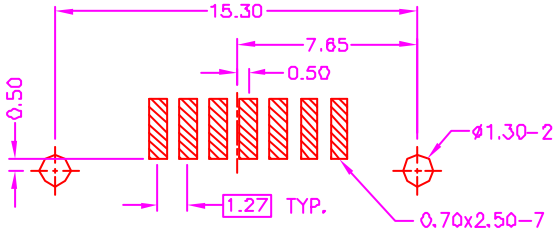


RECOMMEND P.C.B. LAYOUT
TOP VIEW

## MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : BRASS, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.40mm)

## SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

## ORDER INFORMATION :

97 - 09 03 - 7

SERIES CODE

TYPE 03

NUMBER OF POSITIONS

| | | | |
|---|---|---|---|
| TOLERANCE<br>.0=±.0.30 [.012]<br>.00=±0.20 [.008]<br>.000=±.XXX<br>.0000=±.<br>ANG.=±3° | DRAWER MJE | Astron<br>ASTRON TECHNOLOGY CORP. | |
| | CHECK LION | NAME SERIAL ATA CONNECTOR P.C.B. MOUNT SMT VERTICAL, SIGNAL PLUG | |
| | APP'D Katherlin | | |
| UNITS : mm [inch] | PRODUCT SPEC. — | DRAW NO. C797-0903 | |
| SCALE NONE / SIZE A4 | SHEET 1 OF 1 / REV. A | 08001/10018 | |