
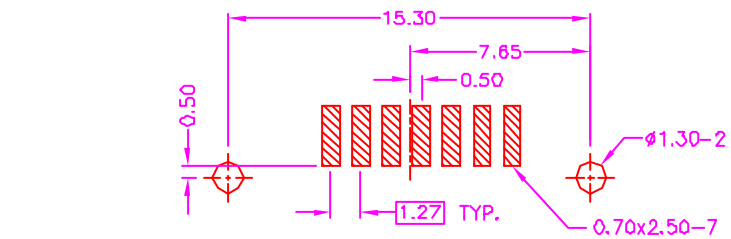
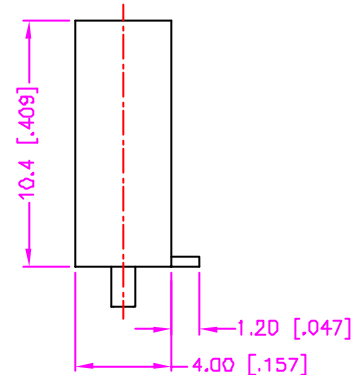
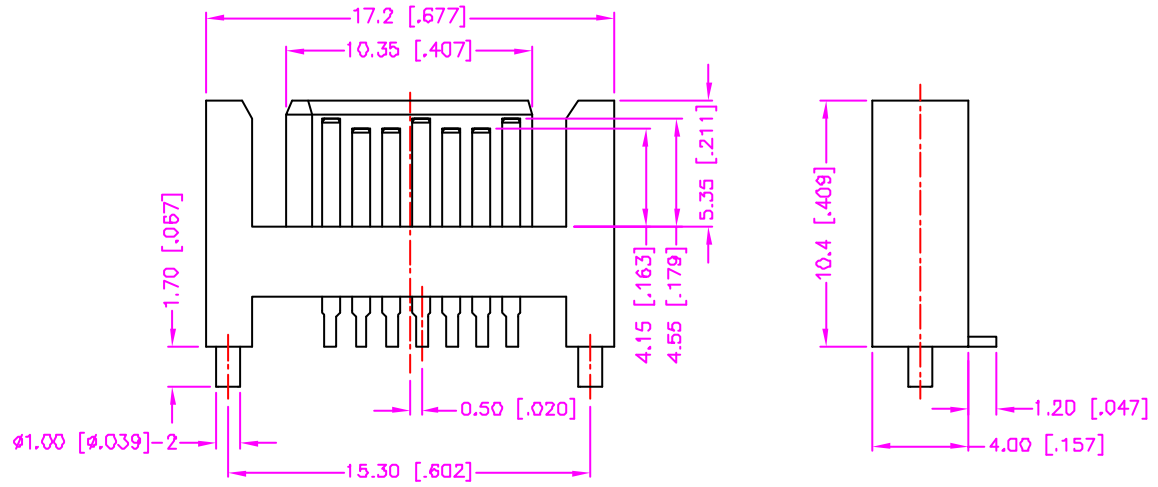


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 26, 2002
1		
2		

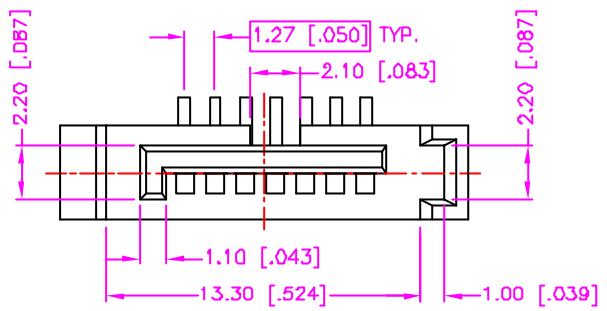

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : BRASS, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

97 - 09 03 - 7

SERIES CODE TYPE 03 NUMBER OF POSITIONS

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>PUB</i>	Astron ASTRON TECHNOLOGY CORP.
	CHECK <i>LJON</i>	
	APP'D <i>Katherine</i>	DRAW NO. C797-0903
	PRODUCT SPEC. —	SCALE NONE SIZE A4 SHEET 1 OF 1 REV. A 08001/1001B