
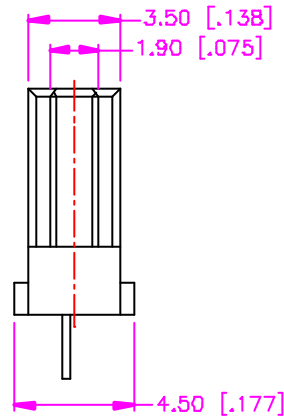
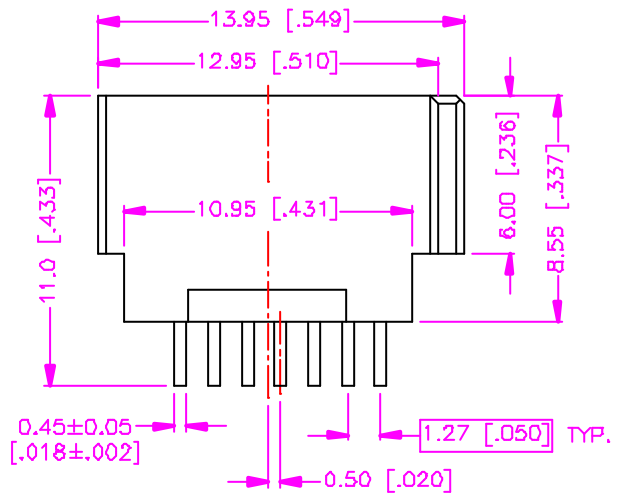


| REV. | DESCRIPTION  | DATE          |
|------|--------------|---------------|
| —    | RELEASE      | Jul. 28, 2002 |
| 1    | SPEC. MODIFY | Jul. 08, 2002 |
| 2    | DRAW MODIFY  | Jul. 12, 2002 |

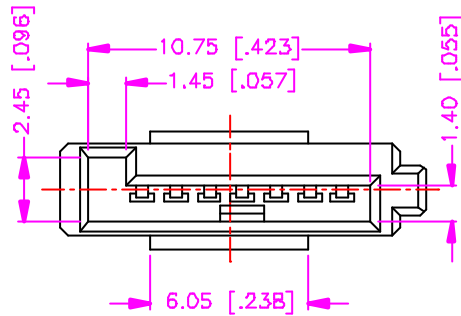


### MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL ; PHOSPHOR BRONZE, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.30mm)

### SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.

### ORDER INFORMATION :

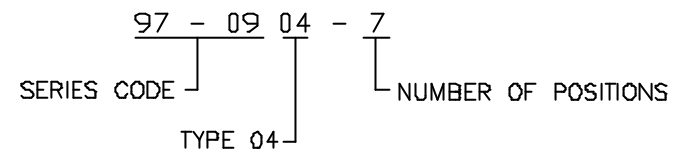

|   |   |   |
|---|---|---|
| TOLERANCE<br>.0±.0.30 [.012]<br>.00±.0.20 [.006]<br>.000±.XXX<br>.0000±.<br>ANG.±3° | DRAWER<br><i>PUG</i><br>CHECK<br><i>Kathleen</i><br>APP'D<br><i>WFB/LLY</i> | <br>ASTRON TECHNOLOGY CORP.<br>NAME<br>SERIAL ATA CONNECTOR<br>CABLE MOUNT, SIGNAL SOCKET |
| <br>UNITS : mm [inch]   | PRODUCT SPEC.<br>—  |   |
| SCALE<br>NONE   | SIZE<br>A4  | DRAW NO.<br>C797-0904   |
| SHEET<br>1 OF 1   | REV.<br>C   | 10018   |