
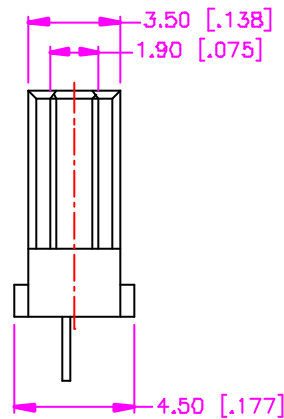
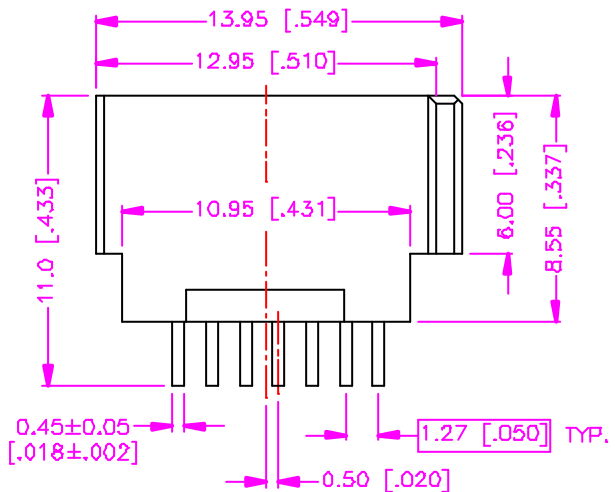


REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 28, 2002
1	SPEC. MODIFY	Jul. 08, 2002
2	DRAW MODIFY	Jul. 12, 2002

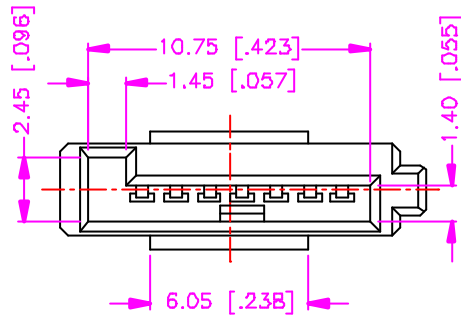


### MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL ; PHOSPHOR BRONZE, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.30mm)

### SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.

### ORDER INFORMATION :

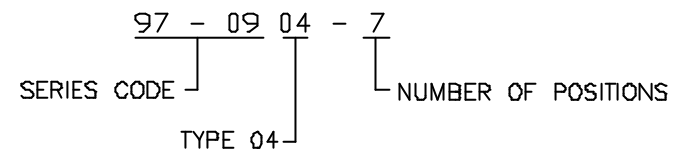

TOLERANCE .0±.0.30 [.012] .00±.0.20 [.006] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>PUG</i> CHECK <i>Kathleen</i> APP'D <i>WFB/LLY</i>	 ASTRON TECHNOLOGY CORP. NAME SERIAL ATA CONNECTOR CABLE MOUNT, SIGNAL SOCKET
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C797-0904
SHEET 1 OF 1	REV. C	10018