


REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 18, 2002
1	DRAW MODIFY	Jun. DB, 2003
2		

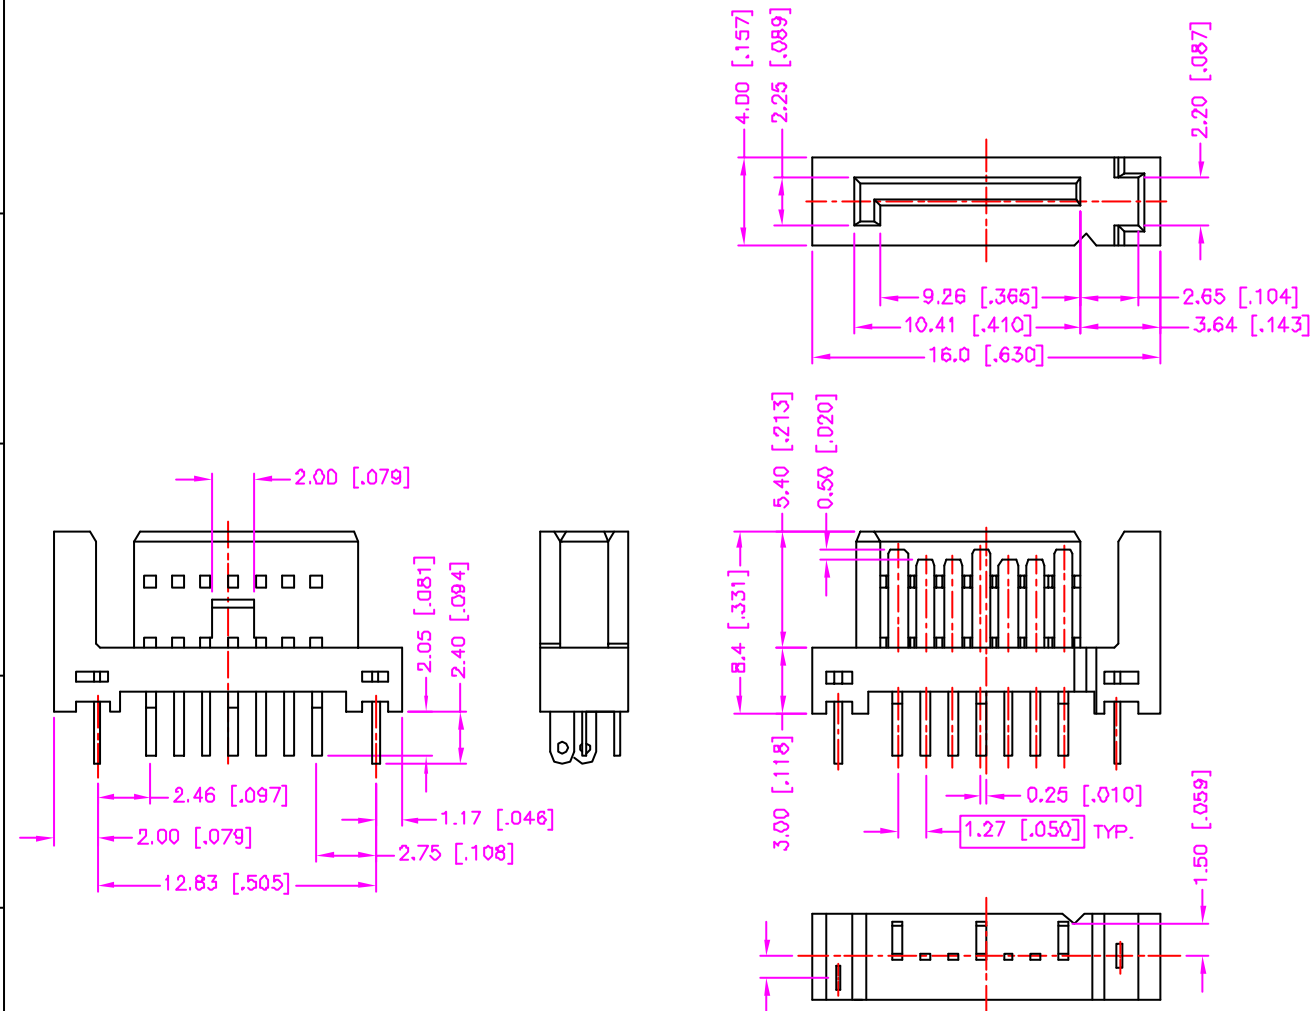



MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.25mm)

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

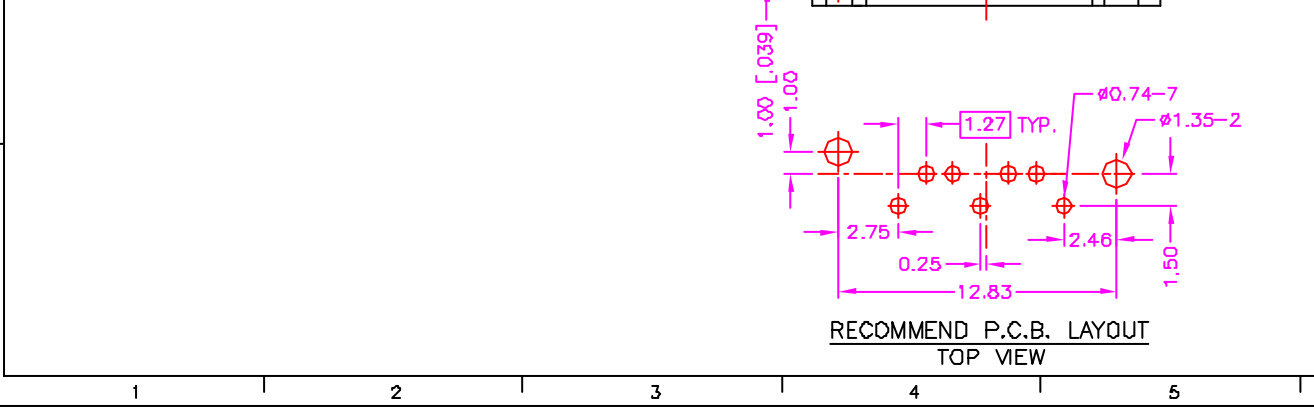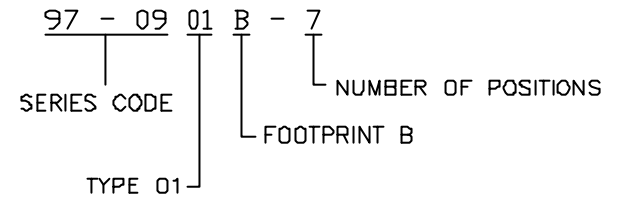

TOLERANCE		DRAWER	
.0=±0.30 [.012]		<i>Katherine</i>	
.00=±0.20 [.008]		CHECK	
.000=±.XXX		<i>YFON</i>	
.0000=±.		APP'D	
ANG.=±3°		<i>YUS</i>	
UNITS : mm [inch]		PRODUCT SPEC.	
SCALE NONE		—	
SIZE A4		SHEET 1 OF 1	
		REV. B	

Astron	
ASTRON TECHNOLOGY CORP.	
NAME SERIAL ATA CONNECTOR	
P.C.B. MOUNT VERTICAL, SIGNAL PLUG STRAGGERED, FOOTPRINT B	
DRAW NO. C797-0905	
10018	