
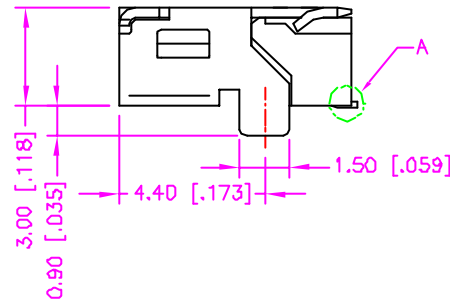
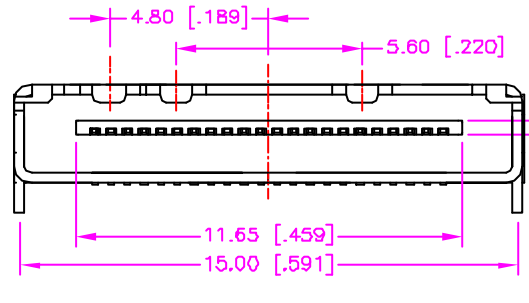


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 21, 2002
1	SHELL PLATING MODIFY	Jan. 17, 2003
2	DRAW MODIFY	Feb. 11, 2003
3	DRAW MODIFY	Apr. 23, 2003
4	P/N MODIFY	Jul. 11, 2003
5	DRAW MODIFY	Aug. 02, 2003

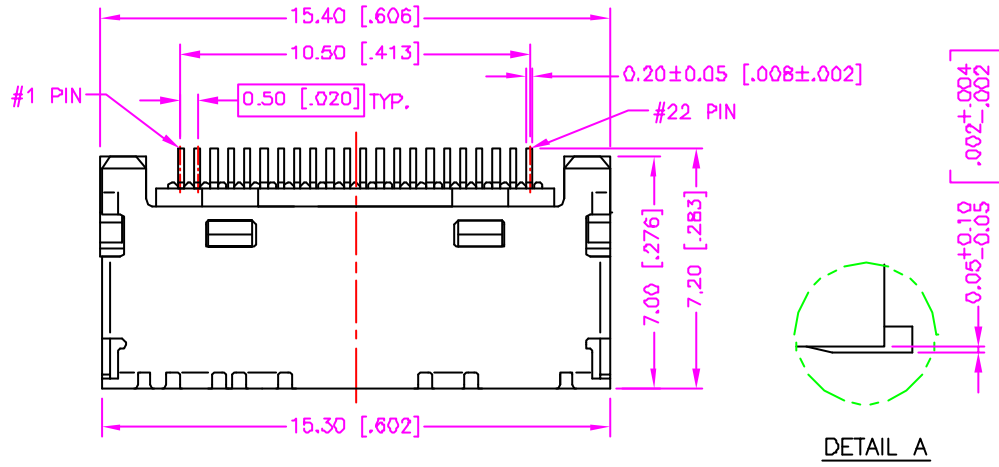

MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY, GOLD PLATING.
(t=0.20mm)
- SHELL : STAINLESS STEEL, NICKEL PLATING.
(t=0.30mm)


SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
250V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
AT 250V DC.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- MAX. PROCESSING TEMP. :
230°C FOR 30 ~ 60 SECONDS.


ORDER INFORMATION :

6191022-01*

- PACKAGE OPTIONS:
1: TAPE PACKAGE
5: TRAY PACKAGE

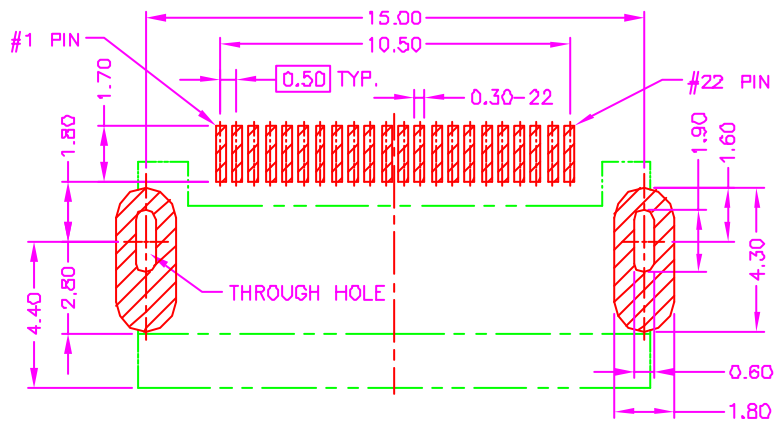

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.XX .0000=±. ANG.=±3°		DRAWER <i>Katherlin</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>MUS</i>	
SCALE NONE		APP'D <i>LLON</i>	NAME MOBILE PHONE CONNECTOR P.C.B. MOUNT SMT, MALE 0.50mm PITCH, 22 PINS TYPE II, (A TYPE)
SIZE A4		PRODUCT SPEC.	DRAW NO. C797-112B
SHEET 1 OF 1		REV. F	10018