


REV.	DESCRIPTION	DATE
—	RELEASED	Aug 04,2003

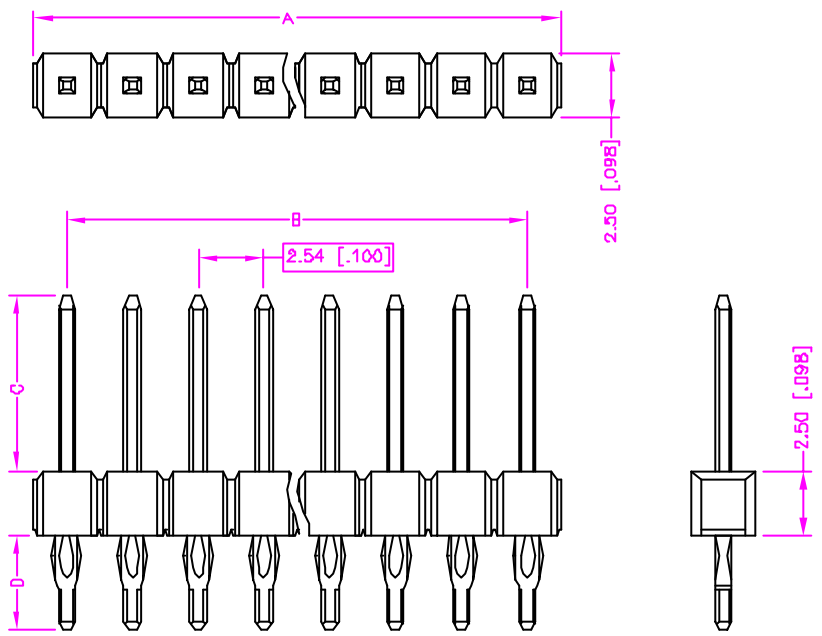

$$A = (\text{TOTAL NO. OF PINS}) \times 2.54 \pm 0.38$$

$$(\text{TOTAL NO. OF PINS}) \times 1.00 \pm 0.15$$

$$B = (\text{TOTAL NO. OF PINS} - 1) \times 2.54 \pm 0.25$$

$$(\text{TOTAL NO. OF PINS} - 1) \times 1.00 \pm 0.10$$



MATERIALS

- 1. HOUSING : THERMOPLASTIC (UL94V-0) BLACK
- 2. TERMINAL : COPPER ALLOY
GOLD PLATED ON CONTACT AREA
TIN PLATED ON TAIL
UNDER NICKEL PLATED. (t=0.60mm)

SPECIFICATION

- 1. CURRENT RATING : 3 A. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 1000MΩ MIN.
AT 500V DC.
- 4. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION:

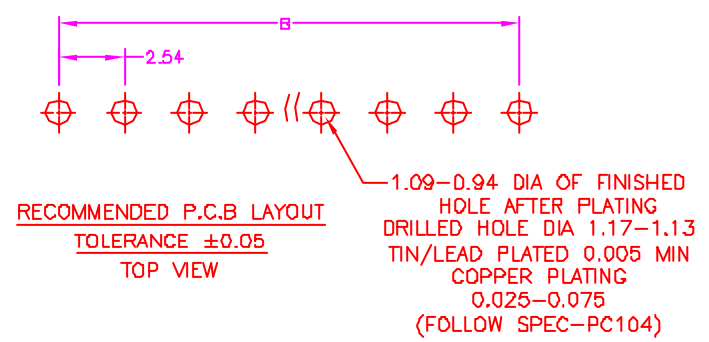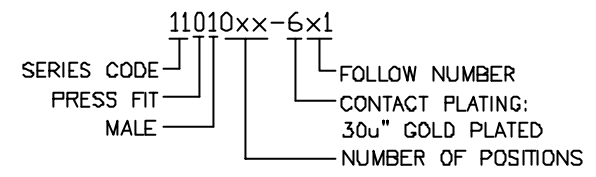

P/N	DIM C	DIM D
11010xx-601	6.80	3.6
11010xx-611	5.68	4.7
11010xx-621	7.50	4.7
11010xx-631	8.30	4.7

TOLERANCE .0=±0.38 [.015] .00=±0.25 [.010] .000=±.xxx .0000=±. ANG.=±3'		DRAWER TENGE		 ASTRON TECHNOLOGY CORP. NAME
 UNITS : mm [inch]		CHECK SUE		
SCALE NONE		SIZE A4		PRODUCT SPEC. —
SHEET 1 OF 1		REV. A		2.54PH PRESS FIT HEADER SINGLE ROW DRAW NO. R11010xx-6x1