
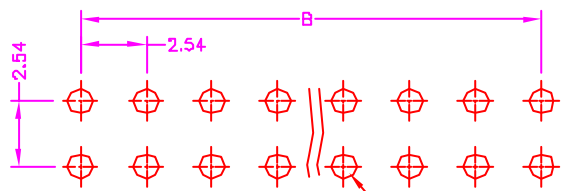
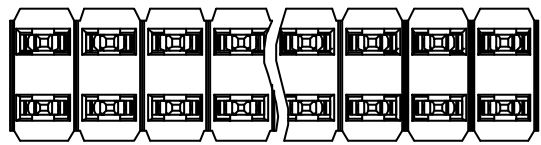
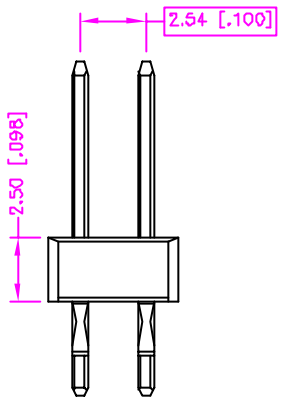
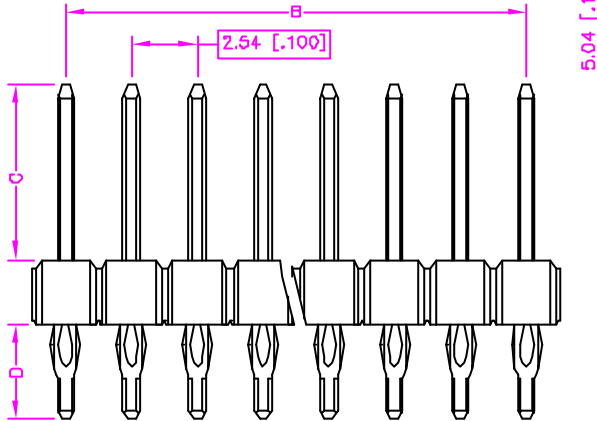


REV.	DESCRIPTION	DATE
—	RELEASED	Aug 04,2003

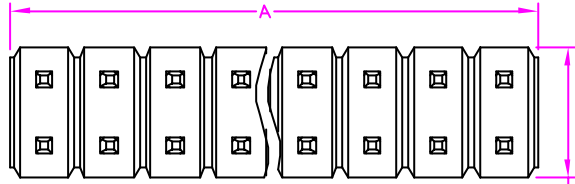

RECOMMENDED P.C.B LAYOUT
TOLERANCE ±0.05
TOP VIEW

1.09-0.94 DIA OF FINISHED HOLE AFTER PLATING
 DRILLED HOLE DIA 1.17-1.13
 TIN/LEAD PLATED 0.005 MIN
 COPPER PLATING 0.025-0.075
 (FOLLOW SPEC-PC104)

$$A = (\text{TOTAL NO. OF PINS}/2) \times 2.54 \pm 0.38$$

$$(\text{TOTAL NO. OF PINS}/2) \times 1.00 \pm 0.15$$

$$B = (\text{TOTAL NO. OF PINS}/2 - 1) \times 2.54 \pm 0.25$$

$$(\text{TOTAL NO. OF PINS}/2 - 1) \times 1.00 \pm 0.10$$


MATERIALS

- HOUSING : THERMOPLASTIC (UL94V-0) BLACK
- TERMINAL : COPPER ALLOY
 GOLD PLATED ON CONTACT AREA
 TIN PLATED ON TAIL
 UNDER NICKEL PLATED. (t=0.60mm)

SPECIFICATION

- CURRENT RATING : 3 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M Ω MIN.
 AT 500V DC.
- OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION:

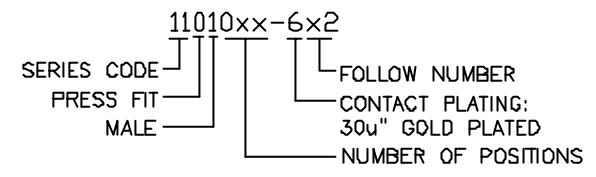

P/N	DIM C	DIM D
11010xx-602	6.80	3.6
11010xx-612	5.68	4.7
11010xx-622	7.50	4.7
11010xx-632	8.30	4.7

TOLERANCE .0=±0.38 [.015] .00=±0.25 [.010] .000=±.xxx .0000=±. ANG.=±3'		DRAWER TENGE		 ASTRON TECHNOLOGY CORP. NAME 2.54PH PRESS FIT HEADER DUAL ROW DRAW NO. R11010xx-6x2
CHECK SUE		APP'D LION		
UNITS : mm [inch]		PRODUCT SPEC. —		
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	