
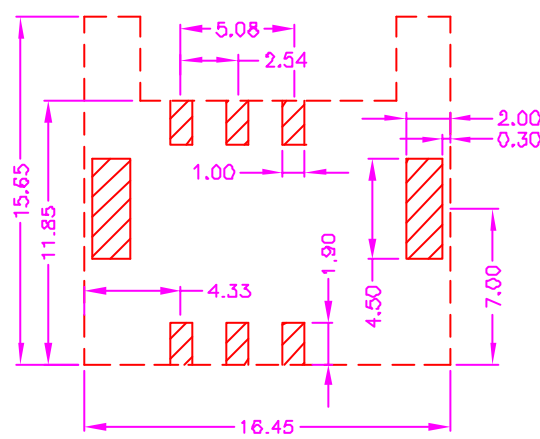
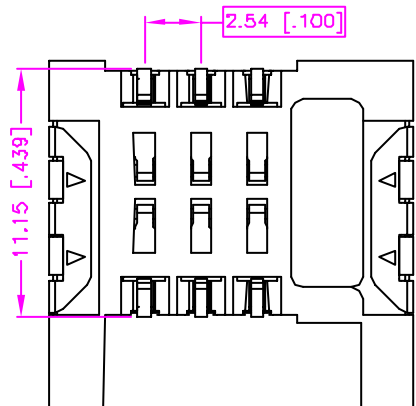
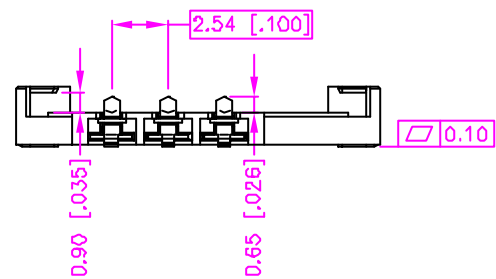
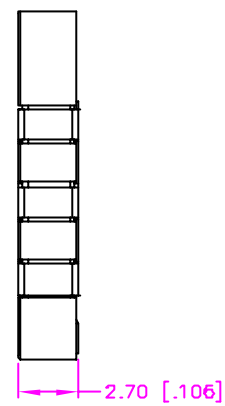


REV	DESCRIPTION	DATE
—	RELEASE	Aug 22, 2003
B	03'0910	Sep 11, 2003
C	03'0912	Sep 15, 2003
D	03'0931	Sep 20, 2003

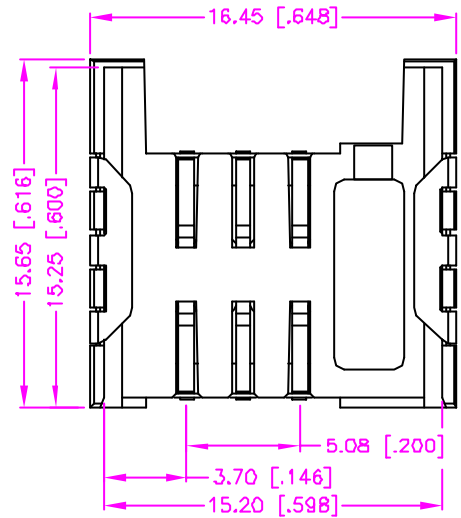

RECOMMEND P.C.B. LAYOUT  
TOLERANCE ±0.05  
TOP VIEW


### MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
- TERMINAL : COPPER ALLOY.(t=0.15mm)  
GOLD PLATED OVER NICKEL
- FORK : COPPER ALLOY. (t=0.20mm)  
TIN PLATED OVER NICKEL

### SPECIFICATION

- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

### ORDER INFORMATION:

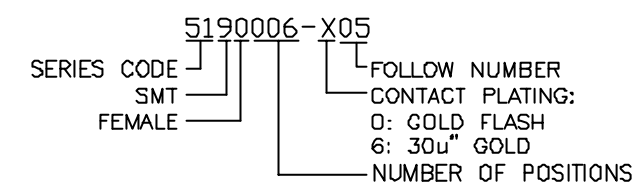

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±. .0000=±. ANG.=±3°		DRAWER <i>Tenge</i>		 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>PUB</i>		
SCALE NONE		APP'D <i>LION</i>		NAME SIM CARD 2.54PH
SIZE A4		PRODUCT SPEC. —		DRAW NO. R5190006-X05
SHEET 1 OF 1		REV. D		