
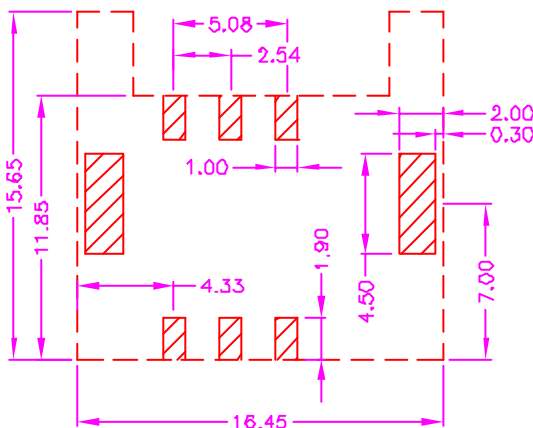
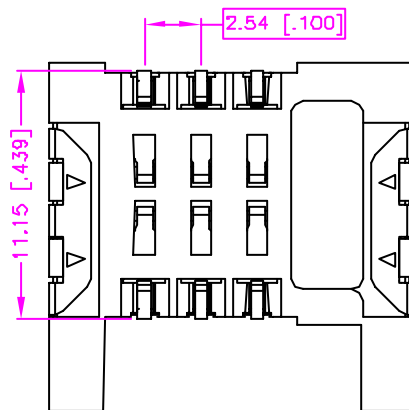
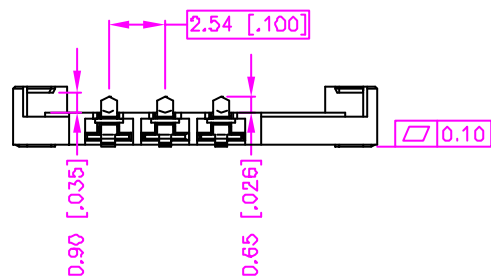
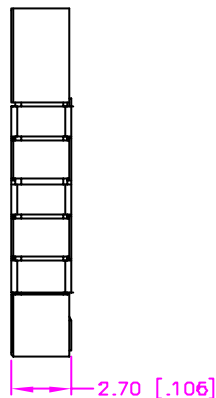


| REV | DESCRIPTION | DATE |
|-----|-------------|--------------|
| — | RELEASE | Aug 22, 2003 |
| B | 03'0910 | Sep 11, 2003 |
| C | 03'0912 | Sep 15, 2003 |
| D | 03'0931 | Sep 20, 2003 |

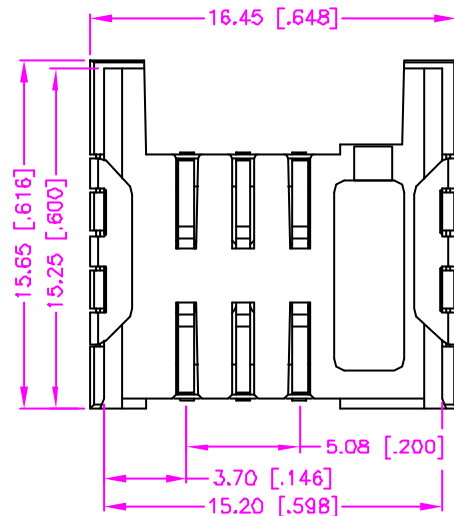

**RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW**


MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
- TERMINAL : COPPER ALLOY.(t=0.15mm)
GOLD PLATED OVER NICKEL
- FORK : COPPER ALLOY. (t=0.20mm)
TIN PLATED OVER NICKEL

SPECIFICATION

- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION:

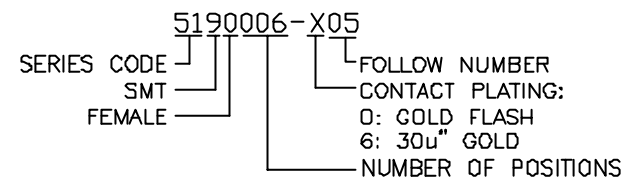

| | | | | |
|---|--|------------------------|--|-------------------------------------|
| TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±. .0000=±. ANG.=±3° | | DRAWER <i>Tenge</i> | | ASTRON TECHNOLOGY CORP. NAME |
| UNITS : mm [inch] | | CHECK <i>PUB</i> | | |
| SCALE NONE | | APP'D <i>LION</i> | | NAME SIM CARD 2.54PH |
| SIZE A4 | | PRODUCT SPEC. — | | DRAW NO. R5190006-X05 |
| SHEET 1 OF 1 | | REV. D | | |