
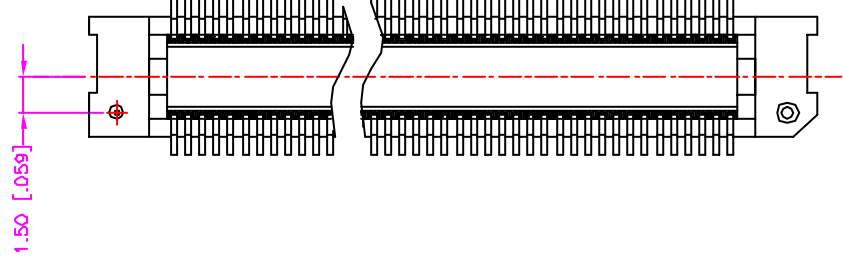
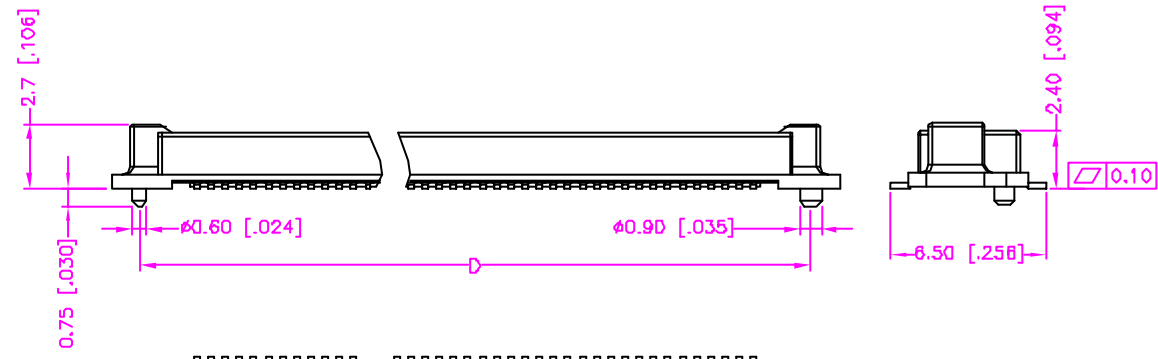
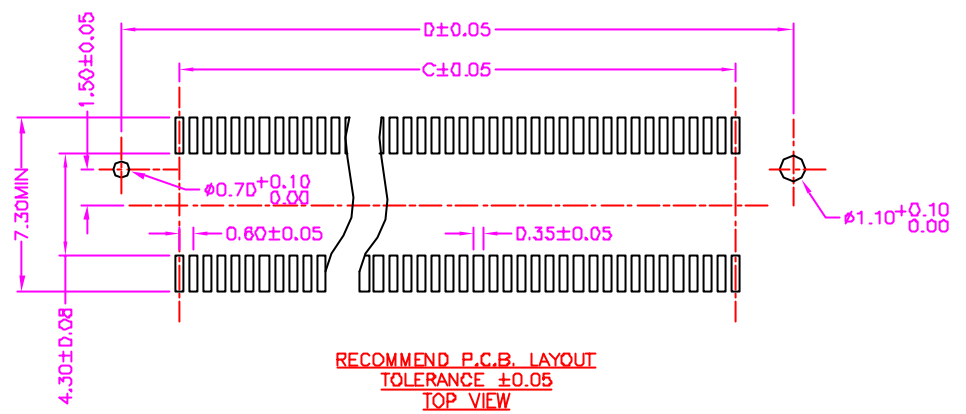


REV.	DESCRIPTION	DATE
—	RELEASE	Apr 28, 2003
B	D3'07D1	Jul 01, 2003
C	03'1242	Dec 22, 2003

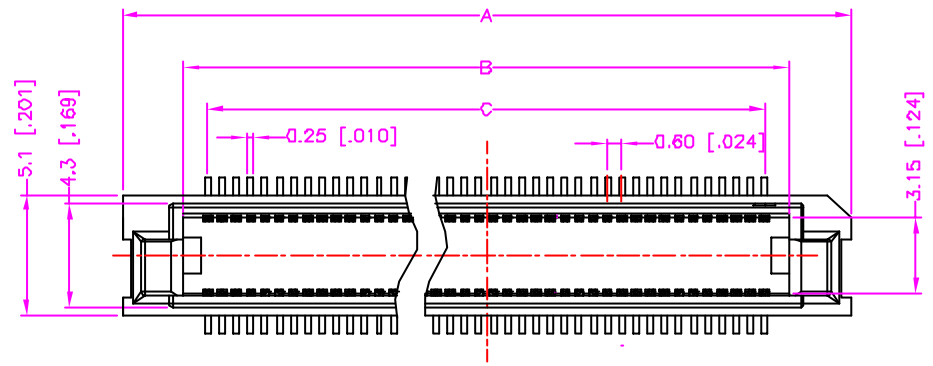


MATERIALS

1. HOUSING : HI-TEMP. PLASTIC (UL 94V-0).BEIGE
2. TERMINAL : COPPER ALLOY,t=0.20mm. GOLD PLATED ON CONTACT AREA, TIN/LEAD PLATED ON SOLDER TAILS, NICKEL PLATED UNDERALL.

SPECIFICATION

1. CURRENT RATING : 0.4 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 300V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M MIN AT 250V DC.
4. OPERATING TEMPERATURE : -55°C TO +85°C.

ORDER INFORMATION :

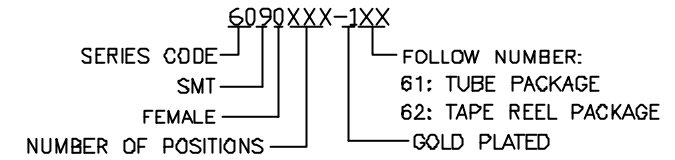

100	36.6 [1.441]	31.40 [1.236]	29.40 [1.157]	34.20 [1.346]
80	30.6 [1.205]	25.40 [1.000]	23.40 [.921]	28.20 [1.110]
Number Of Position	A	B	C	D

TOLERANCE	
.0=±0.38 [.015]	
.00=±0.25 [.010]	
.000=±0.15 [.006]	
.0000=±	
ANG.=±3°	
UNITS : mm [Inch]	
SCALE NONE	SIZE A4

DRAWER	NPK
CHECK	Kathanlin
APP'D	LJON
PRODUCT SPEC.	
SHEET	1 OF 1
REV.	C

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	
B TO B 0.6PH SMT FEMALE	
DRAW NO.	
R6090XXX-161(2)	