

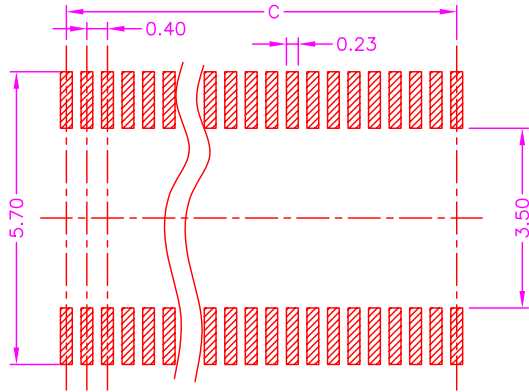
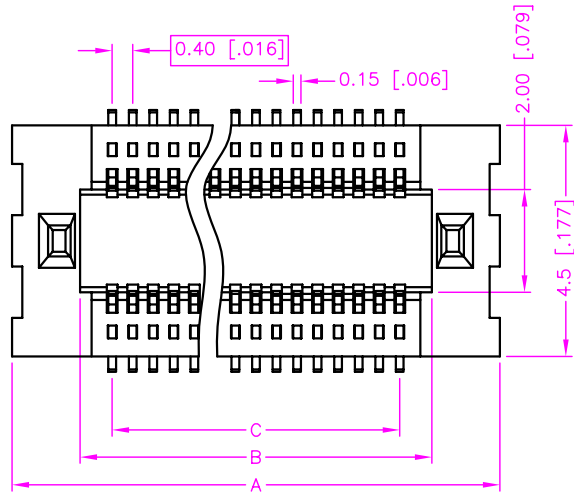
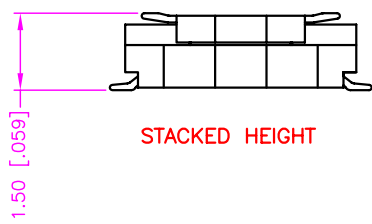
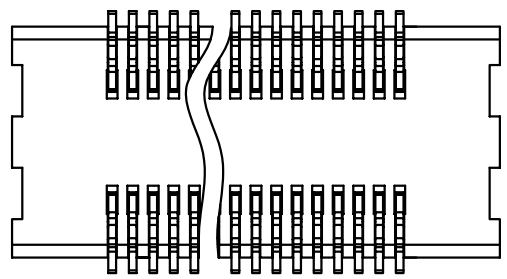


REV.	DESCRIPTION	DATE
-	RELEASE	May 06,2004
B	04'0522	May 13,2004

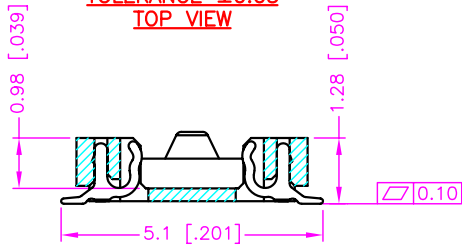

**RECOMMENDED P.C.B LAYOUT**  
TOLERANCE  $\pm 0.05$   
TOP VIEW

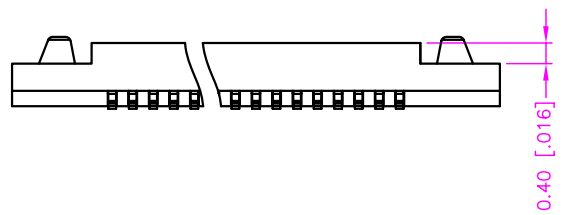

**MATERIALS**


- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).BEIGE
- TERMINAL: COPPER ALLOY (t=0.15mm). GOLD PLATED OVER NICKEL.

**SPECIFICATION**

- CURRENT RATING : 0.3 A MAX.
- INSULATION RESISTANCE: 1000M $\Omega$  MIN AT 500V DC.
- DIELECTRIC WITHSTANDING VOLTAGE: 150V AC R.M.S. FOR ONE MINUTE.
- CONTACT RESISTANCE: 70m $\Omega$  MAX.
- OPERATING TEMPERATURE: -40°C ~ +105°C.

60	15.50 [.610]	12.85 [.506]	11.60 [.457]
40	11.50 [.453]	8.85 [.348]	7.60 [.299]
34	10.30 [.406]	7.65 [.301]	6.40 [.252]
30	9.50 [.374]	6.85 [.270]	5.60 [.220]
Number Of Position	A	B	C

**ORDERING INFORMATION**

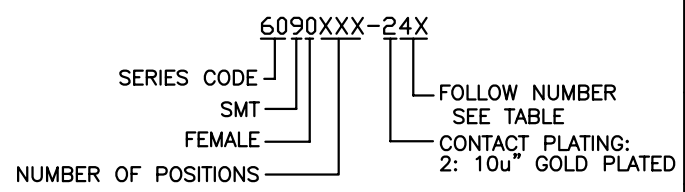

	MALE	6091XXX-244	6091XXX-242	1.50 [.059]
	FEMALE	6090XXX-244	6090XXX-242	
	TUBE PACKAGE		TAPE PACKAGE	STACKED HEIGHT

TOLERANCE .0=±0.25 [.010] .00=±0.15 [.006] .000=±0.10 [.004] .0000=±. ANG.=±3°		DRAWER NICK	 ASTRON TECHNOLOGY CORP.
 UNITS : mm [inch]		CHECK ERIC	
SCALE 1:1		APP'D LION	NAME B TO B 0.4PH SMT FEMALE H=1.50
SIZE A4	SHEET 1 OF 1	PRODUCT SPEC. -	DRAW NO. R6090XXX-242(44)
		REV. B	