

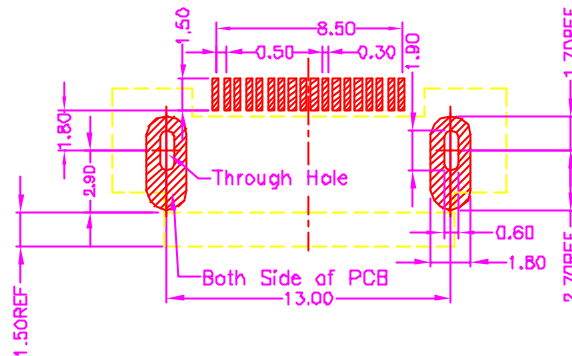
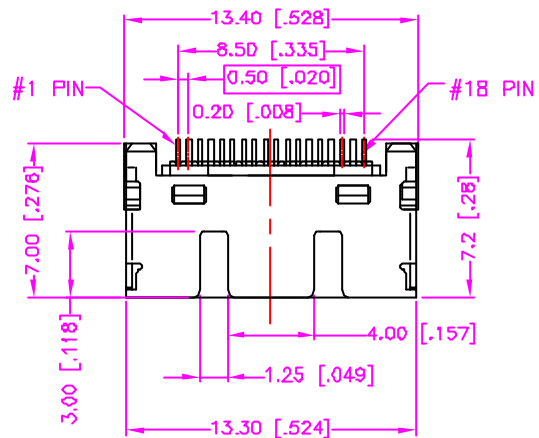



REV.	DESCRIPTION	DATE
—	RELEASE	Jun 03,2003
B	03'0619	Jun 13,2003
C	03'0715	Jul 12,2003
D	03'0733	Jul 22,2003

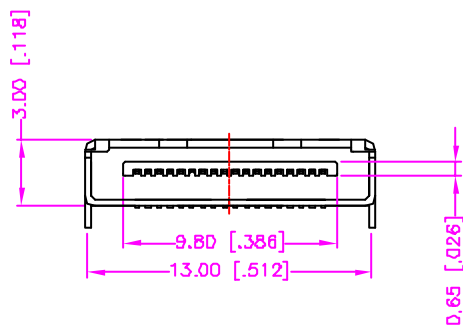

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

ORDER INFORMATION :

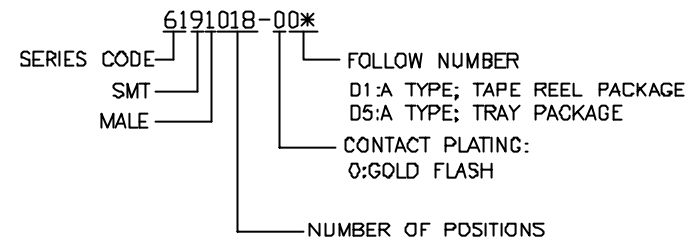


MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY, GOLD PLATED OVERALL. (t=0.20mm, SIGNAL TERMINAL)
- SHELL : STAINLESS STEEL, NICKEL PLATED ALL OVER. (t=0.30mm)

SPECIFICATION

- CURRENT RATING : 1 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000 M MIN AT 250V DC.
- OPERATING TEMPERATURE : -40°C TO +85°C.



TOLERANCE	DRAWER <i>LSC</i>	Atron ASTRON TECHNOLOGY CORP.
.0±.038 [.015]	CHECK <i>MUC</i>	
.00±.025 [.010]	APP'D <i>LJON</i>	NAME 0.5PH IN-PHONE 18P TYPE (A TYPE)
.000±.015 [.006]	PRODUCT SPEC. —	DRAW NO. R6191018-001(05)
.0000±.	UNITS : mm [Inch]	
ANG.±3°	SCALE NONE	
	SIZE A4	
	SHEET 1 OF 1	
	REV. D	