


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 28, 2001
1		
2		



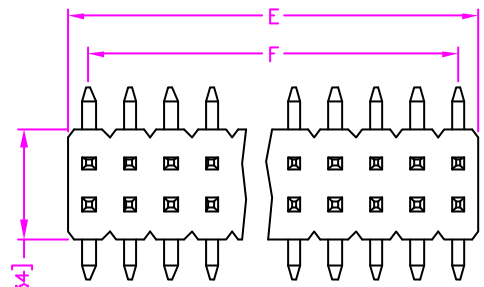


$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 \pm 0.30$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.050 \pm 0.012$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$$

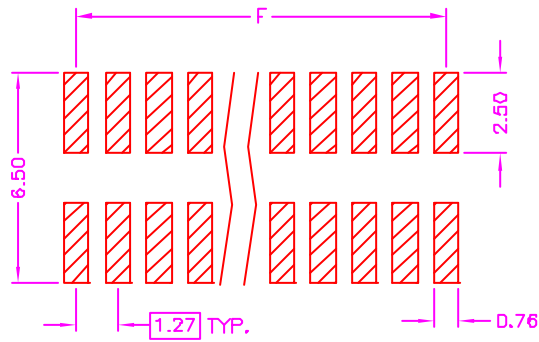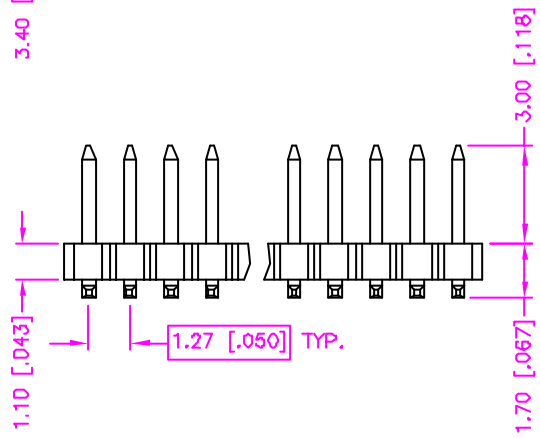

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : S.Q. Ø.40mm COPPER ALLOY.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.
5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

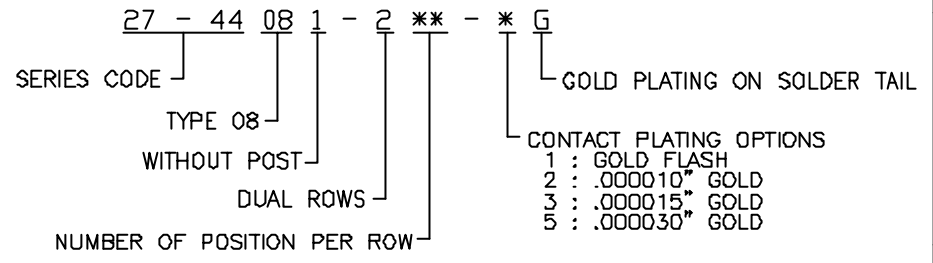

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>SUE</i> CHECK <i>Katherlin</i> APP'D <i>ALB</i>	 ASTRON TECHNOLOGY CORP. NAME POST HEADER 1.27x1.27mm PITCH, P.C.B. MOUNT SMT TYPE
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C333-4006
SHEET 1 OF 1	REV. A	05005